

**JORDAN VALLEY WATER CONSERVANCY DISTRICT  
2022 DISTRIBUTION PIPELINE REPLACEMENTS  
REDMAPLE AREA**

**JANUARY 2022**

**ADDENDUM NO. 2**

**PART 1 – GENERAL**

- A. The following ADDENDUM shall be made part of the Bidding Documents, and the Bidder shall acknowledge receipt thereof on page C-1 of the BID. The addendum consists of 3 pages of written text (including this cover sheet).
  
- B. This addendum will revise the bid date to be Monday, January 24, 2022, at 3:30 P.M.

**Part 2 - CLARIFICATIONS**

- 1. This addendum provides clarification regarding the temporary connections, temporary water, and bypass water required for this project. This provides an overview of how these are to be staged for the project. Contractor may suggest alternative ideas once project begins. Please see Figure 1 in this addendum for overview map and locations of specific zones referred to in this addendum.
  
- 2. The zones on Figure 1 refer to the zones affected by temporary connections. Note that Empire Ave, Empire Circle, and 3720 South have no temporary connections with this project.
  - A. In Zone A on Figure 1, a temporary connection is required as seen on Drawing PP-4 and Detail 5 on Drawing D-1. This connection is to be constructed in conjunction with Detail 4 on Drawing D-1. This work will need to be completed within a 6-hour waterline shutdown period.
  
  - B. Zones B, C, and D will receive water from the existing 6" cast iron pipes via the temporary connection (Detail 5, Drawing D-1) as construction continues.
  
  - C. The work in Zone B should proceed next. This includes Redmaple Road from the temporary connection in Zone A to the end of Redmaple Circle, plus the Redmaple Road running North/South from Station 11+90 (PP-8) to about Station 9+10 (PP7). This section, up to the new hydrant and gate valve on PP-7 and Detail 8 on D-2 shall be flushed and tested, placed in service, and connected to service laterals prior to the work in Zones C and D.
  
  - D. Once the work in Zone B is in operation, the new hydrant located near Station 9+40 can be used to provide temporary water downstream. The meters called out by Keyed Note 1 on PP-7 are to receive temporary water. Zone D shall receive water via a temporary bypass referred to in specification 02565-2 paragraph 201.01.C and called out on Keyed Note 2 of PP-7. Thus, Zone D shall receive water in the existing 6" cast iron pipe via

this temporary bypass while work continues. Once Zones C and D are receiving bypass water, the temporary connection in Zone A can be isolated and work can commence in Zone C. The existing pipelines in Zone C must be abandoned prior to laying the new piping in its place.

- E. Zone D can continue to receive water via the bypass until all new construction in Zone D is complete, flushed, tested, and all services are tied into the new pipelines.
- F. Zone E, 3680 South, also receives temporary water as specified in Keyed Note 1 on PP-13 and specification 02565-2 paragraph 201.01.C.

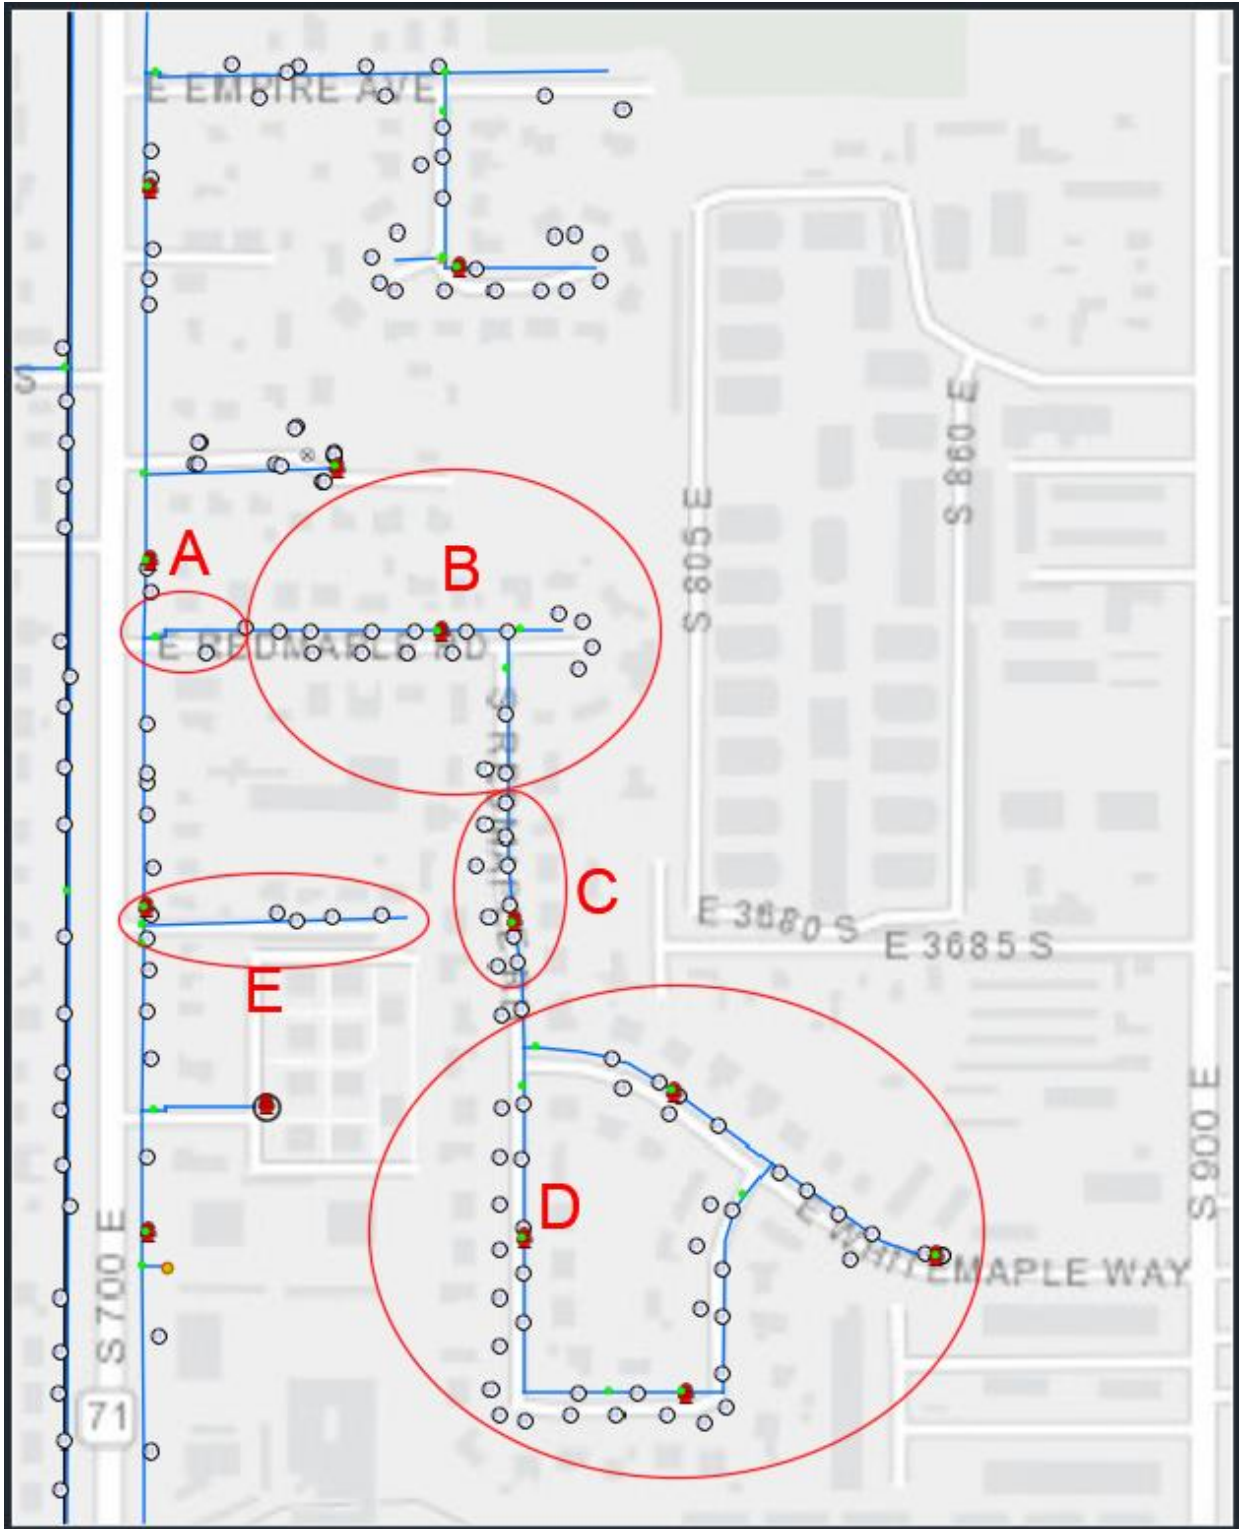


Figure 1: Areas of new Distribution Pipeline in Redmaple Area

This Addendum shall be incorporated into and made part of the Bidding Documents.

- END OF DOCUMENT -